

ES110 Series Electric Strike

General Description

The ES110 is a cost efficient robust electric strike with a solid construction of one-piece cast aluminium body and stainless steel striker. Having a deeper than normal strike-keeper area, ES110 is designed to work with an extensive range of locks and offers the same level of security and reliability usually provided by more expensive electric locking solutions.

Extension lips are available to accommodate the installation of electric strikes on door frames with different thickness. The ES110 product range of patented electric strikes are suitable for use with all access control installations where flexibility, security and lower cost are required.

Key Features

- Fail safe/fail secure changeable on site
- Stainless steel striker for extra strength and durability
- Stainless steel locking pins
- Available in 12 or 24Vdc
- Optional mounting kit
- Installation template
- IP56 weather resistant version available
- Suitable For 18mm latch with a 3mm door gap
- Australian designed and made
- **TRIGARE**® 5 Year Warranty

Applications

- Exposed areas (weather resistant models)
- High traffic areas
- Open in/open out doors
- Suitable for use with all access control systems



Standards and Compliance



Successfully fire rated up to 4hrs on fire door assemblies in accordance with AS1905.1. 2005 (Part 1: Fire resistant door sets)



Approved to UL1034 (highest level)




CE Approved




C-Tick Certified

Weather Resistant Version (IP56) available


ES110 Series Electric Strike

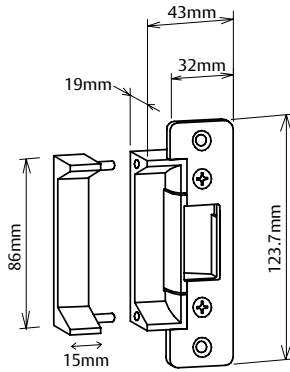

ES110 with 15mm ext lip
- "A" Plate

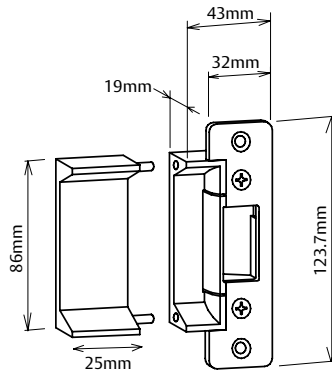

ES110 with 25mm ext lip
- "A" Plate

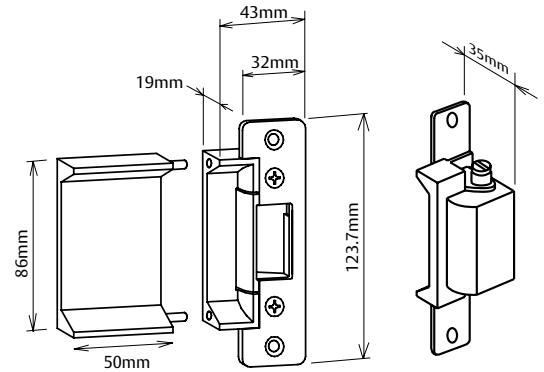

ES110 with 50mm ext lip
- "A" Plate

ES110 Technical Information

Voltage	12 or 24Vdc
Current	243 mA @ 12Vdc – 187mA @ 24Vdc
Solenoid	Solenoids are rated for continuous use.
Monitoring	None
Holding Force	680 kg Static Strength Rating
Endurance	Cycle tested to 1,000,000 operations
Environment	Operational temperature range -20°C to +60°C Weather resistant construction available. (IP56)
Body	Cast Aluminium Construction
Keeper	Stainless Steel

Ordering Information

Product Description	Part Number
12V Fail Safe Aluminium Faceplate (A)	100111-000
12V Fail Safe Weather Resistant Stainless Steel Faceplate (A)	100111-060
12V Fail Secure Aluminium Faceplate (A)	100112-000
12V Fail Secure Weather Resistant Stainless Steel Faceplate (A)	100112-060
24V Fail Safe Aluminium Faceplate (A)	100113-000
24V Fail Safe Weather Resistant Stainless Steel Faceplate (A)	100113-060
24V Fail Secure Aluminium Faceplate (A)	100114-000
24V Fail Secure Weather Resistant Stainless Steel Faceplate (A)	100114-060

Specification Statement

Where Power to Lock and Power to Open functions may be required in the same building, the strike must be interchangeable from either "Power to Lock" or "Power to Open" on site.

The electric strike should not consume current greater than 243mA @ 12Vdc or 187mA @ 24Vdc and have a solenoid suitable for continuous use. Certifications must include CE, C-tick and 4hr fire rating.

The strike should have a minimum holding force of 680kg, and an endurance rating of 1 million cycles.

Accessories



Product Description	Part Number
15mm Extension Lip	220110-502
25mm Extension Lip	220110-503
50mm Extension Lip	220110-504
Mounting Kit	220200-518

Note: For additional face plate options see over page.

ES110 Series Electric Strike


Faceplates

Faceplate Style	l	w	a	Part Number
A (ANSI Short)	123.7	31.7	104.8	200100-505
B (ANSI Long)	201.6	36.3	185.7	200100-521

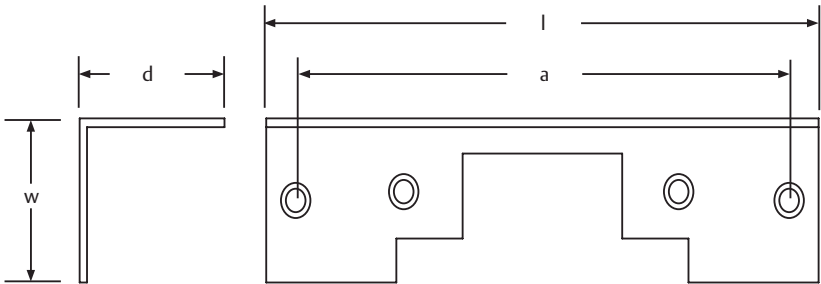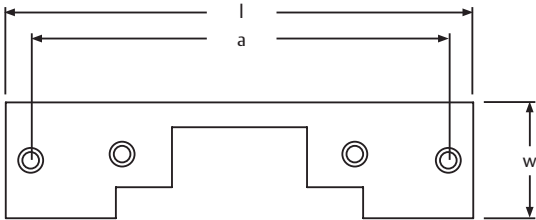

Faceplate Style	l	w	d	a	Part Number
J	201.6	32	16	185.7	210100-523

Faceplate Style	l	w	a	b	Part Number
F (UK Sash RH) [DIN Left]	251	25	74	12	210100-528
G (UK Sash LH) [DIN Right]	251	25	74	12	210100-529
K (Short Sash LH) [DIN Left]	182	32	36.5	14.7	210100-532
L (Short Sash RH) [DIN Right]	182	32	36.5	14.7	210100-534

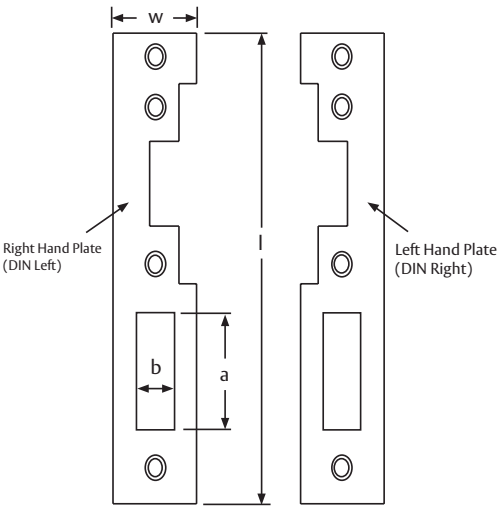

Note: All face plates are sold separately