

Open Voice Intercom

DOOR
1



ROOM
1

LEM-1DL



- Single door open voice access control system.
- Adjustable transmit (front) and tone volumes.
- AC/DC power supply.



LE-D
Door station
→ P.61




EL-9S
Door release



LEM-1DL
Master station
w/door release button


Communication network & wiring

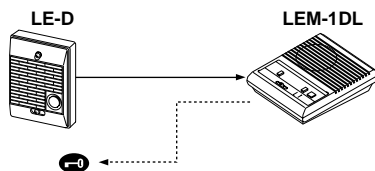


System components

LEM-1DL:	Master station, desk/wall
LE-D:	Sub station, weather-resistant, surface mount
LE-DA:	Flush mount
Power supply:	AC transformer, PS-12A , PS-12B

• Using EL-9S door release

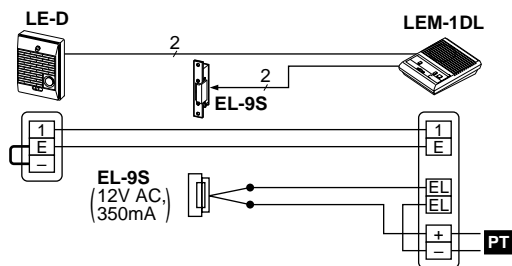


• Using other manufacture's door release

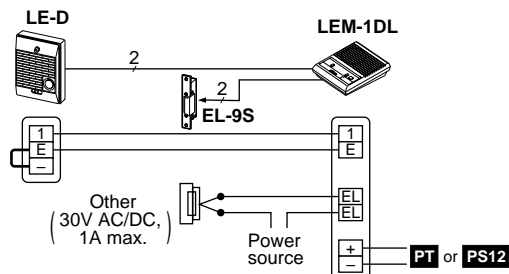


PT : AC trans : 12~16V AC, 4VA. **PS12** : PS-12A, PS-12B

★ Do not remove shorting link

LE-D



LEM-1DL



Specifications (LEM-1DL)

Power source	12~16V AC, 4VA. 12~24V DC, 200mA (24V).	
Power supply	AC transformer, PS-12A, PS-12B	
Communication	Upon called by tone, press TALK to reply. Press door release button for releasing door, and press OFF for standby.	
Wiring	2 wires, non-polarized (+2 for EL-9S)	
Distance	0.65mmø	0.8mmø
• LEM-1DL to door	200m	300m