




IE Series


Entry Security SystemChime-Tone Intercom

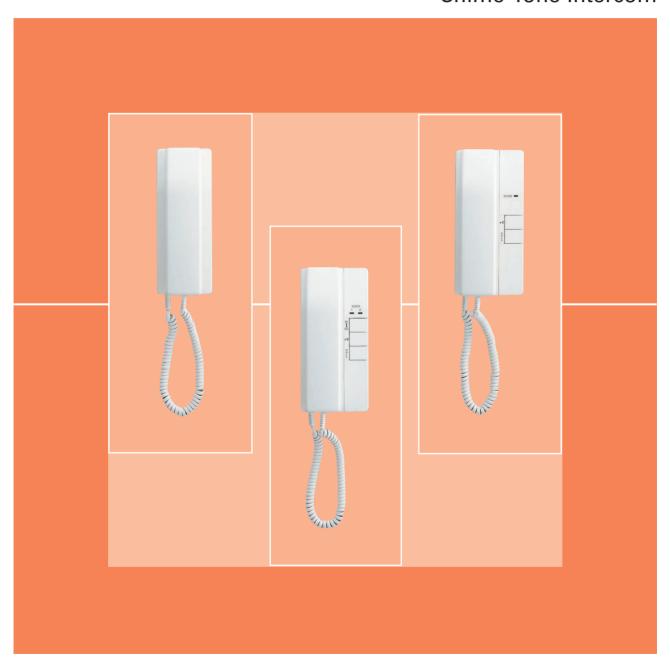

Audio Handset Entry Intercom

IE Series Entry Security Systems

Chime-Tone Intercom

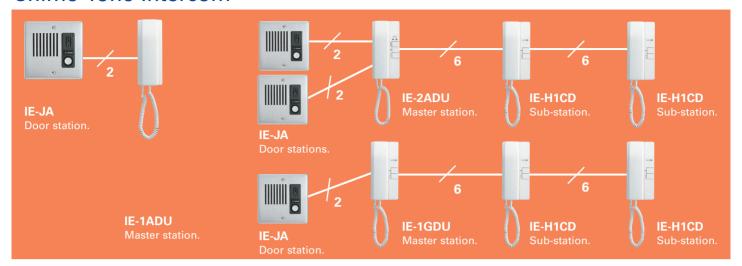

Features

- 3 systems to choose from.
- · Electronic chime tone.
- · Answer the door from any room station.
- Room-to-room communication.
- Single AC 12 V power supply for both communication and door release.
- · Connects to door release system.
- Chime call can be turned down or off at sub stations.
- Large selection of door stations to choose from.

Cables

2 wires to door, 6 wires between handsets.

Specifications

Power Source	AC 12~16 V, 200mA. DC 12~24 V. 200mA.	
Calling	4-stroke electronic chime. 2-stroke electronic chime. (with volume control).	
Wiring	2 to door (non-polarised)2 to door release.6 between room stations.	
Distance		
Diameter	0.65 mm	0.65 mm
IE Series	150 m to door	75 m between rooms

NB. IE-DL 1-3 door stations are made of aluminium and mount directly on the surface of any building. A total of up to three locations can be called from a single entrance.

IE Chime Tone Intercoms can also be used with a Video Entry System (MY-CU PanTilt). For details on these or any other Aiphone system, refer to Aiphone's General Line Catalogue.

Additional Options







IF-DADoor station.

IE-R2Call extension.

IE-JADoor station.



EL-9S Door release, 12 V AC, 0.35A. Requires AC transformer. **IE-FY**Door station.

IE-DCDoor station.

IE-DL3Door station.





