

# DA-2DS/DA-4DS

Two-wire Electric Lock Multi-unit Door Phone




## Door Phone to Accommodate up to 4 Residences



### **Multi-unit Door Phone**

### System Configuration

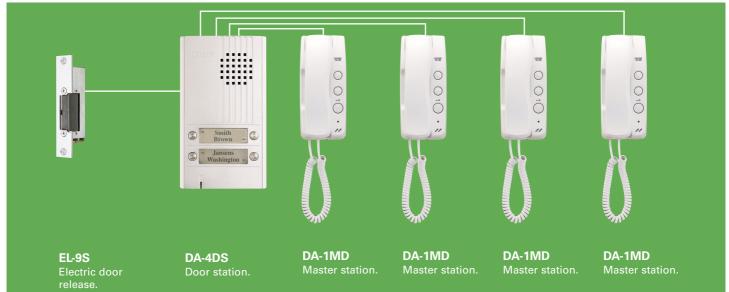

#### **Features**

- Connect Electric Door Release with same two wires from • door station. Requires no extra power supply for door release. An AC operated door strike is required.
- Existing doorbell or chime wires can be utilised (disconnect . from transformer).
- Master station is equipped with Door Release and one . Function button to turn on entrance light, etc.
- Optional call extension sounder.

#### **Specifications**

Power Source	AC 15V, supplied from Power Supply.		
Power Supply	Requires 15 V AC 500mA power supply.		
Calling	Electronic tone (while the button is depressed).		
Communication	Simultaneous with handset.		
Talk path	Single talk channel, with privacy.		
Weight	DA-1MD: approximately 370 g. DA-4DS: approximately 270 g.		
	2 wires, polarised from door to each DA-1MD.		
Wiring	2 wires, pola	rised from door to	o each DA-1MD.
Wiring Distance	2 wires, pola	rised from door to	o each DA-1MD.
	2 wires, pola 0.6 mm	urised from door to 0.8 mm	o each DA-1MD. 1.0 mm
Distance			

#### **Additional Options**





DA-4DG



DAR-1 Call extension sounder.

EL-9S Door release, AC12V, 0.35A.

DA-2DS



Gate, Light, Garage Door. Switch contact is rated at 40mA 24 volts.

15 VAC 500 Power supply.





Your local Aiphone reseller:







DA-2DG

