


TD-H/B Series




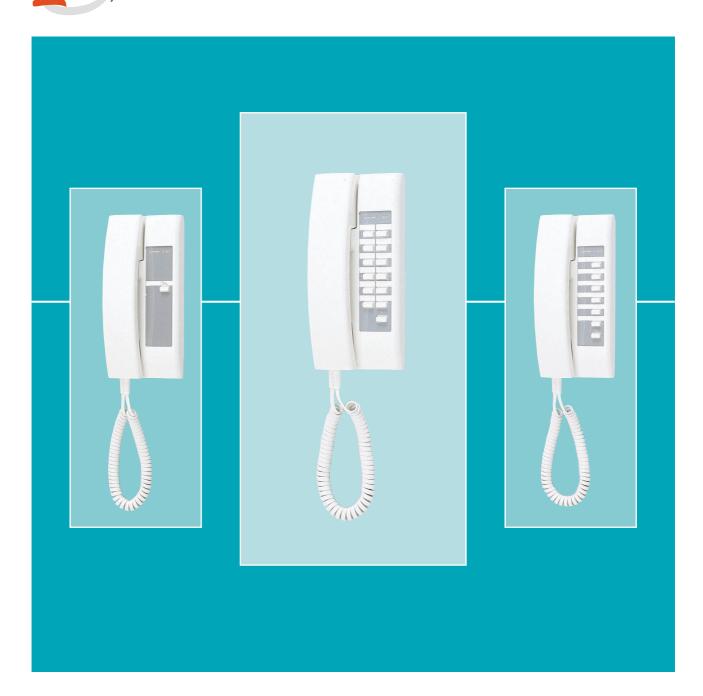

Selective-call System for Internal Communications

TD-H/B Internal Audio Communication

Multi-channel Intercom System

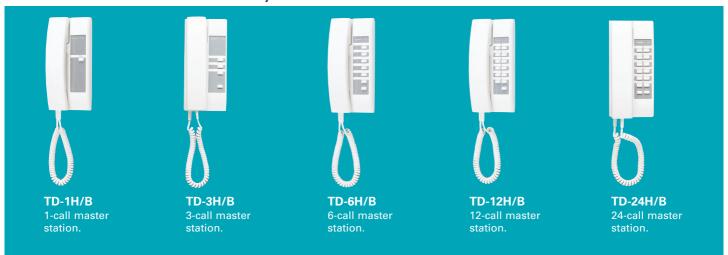

Features

- Multiple talkpaths allow several people to use the system at once.
- Up to two entrance stations with door release can be included.
- Video door stations can be used with MY monitors.
- Conference calling with up to 3 people on the line.
- Paging through overhead speakers to one or multiple zones.
- Up to 25 stations can be included (each door or paging zone counts as a station).
- Reinforced coil cord connectors ensure long term durability.
- Plug-in connectors keep installation simple and easy.

Specifications

Power Source	12 V DC. 70mA per station.
Calling	Station-select button 1~12 and Call button, rings with tremolo tone.
Door station	Maximum 2 door stations. IE/IF Series or PanTilt video, using DE-UR for each.
Wiring distance	650 m with 0.65 mm diameter. 1000 m with 0.8 mm diameter.
Zone page	Multiple zones, using a PD-1 or PD-2 (with talkback), amplifier and an appropriate number of speakers for each zone.
Weight	
TD-1H	410 g
TD-6H	440 g
TD-24H	520 g

Cables

TD-3H	7 conductor.
TD-6H	10 conductor.
TD-12H	16 conductor.
TD-24H	28 conductor.

Terminal boxes for Desk Mounting

TDW1A	for TD1HB
TDW3A	for TD3HB
TDW6A	for TD6HB
TDW12A	for TD12HB
TDW24A	for TD24HB

Additional Options



IF-DADoor station.

MK-DGC

Video door station.



IE-JA Door station.



MK-DAC Video door station.



MK-DBC Video door station.

PD1Paging adaptor.

PD2

Talkback paging adaptor.

RYAC Call relay.

DEUR

Door station adaptor.



